
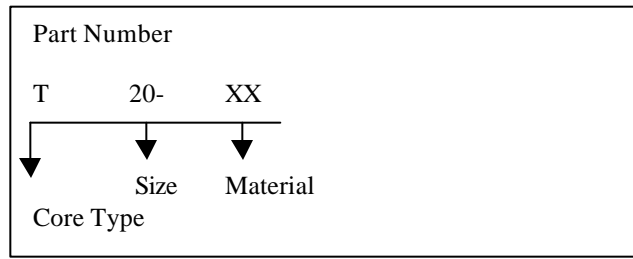


Toroid Core (Iron Powder)



Curie Core Size	OD mm	ID mm	Ht mm	L Cm	A Cm <sup>2</sup>	V Cm <sup>3</sup>	Material / AL VALUE				
							SF53	75	75H	90	35
T20-xx	5.08	2.24	1.78	1.15	0.023	0.026	13	18.5	17.5	21.0	7.8
T25-xx	6.48	3.05	2.44	1.50	0.037	0.055	17	24.5	23	27.6	10
T26-xx	6.73	2.67	4.83	1.47	0.090	0.133	41.5	57	56	67.2	24
T30-xx	7.8	3.84	3.25	1.84	0.060	0.110	22	33.5	30.5	36.6	14
T30K-xx	7.8	3.84	1.5	1.84	0.015	0.046	10.2	15.5	14.1	16.9	6.5
T37-xx	9.53	5.21	3.25	2.31	0.064	0.147	19	28.5	26	31.2	12
T38-xx	9.53	4.45	4.83	2.18	0.114	0.248	36	49	49	58.8	20
T38K-xx	9.53	4.45	3.24	2.184	0.074	0.161	24.1	32.9	32.9	39.5	13.4
T44-xx	11.2	5.82	4.04	2.68	0.099	0.266	25.5	37	35	42	18
T50-xx	12.7	7.70	4.83	3.19	0.112	0.358	24	33	33	39.6	17.5
T50B-xx	12.7	7.70	6.35	3.19	0.148	0.471	32	43.5	43.5	52.2	23
T60-xx	15.2	8.53	5.94	3.74	0.187	0.699	34.5	50	47	56.4	19
T68A-xx	17.5	9.4	6.35	4.23	0.242	1.03	39.5	58	54	64.8	26
T68-xx	17.5	9.40	4.83	4.23	0.179	0.759	29	43.5	40	48	19.5
T68D-xx	17.5	9.4	9.53	4.23	0.358	1.52	59	87	80	96	37.5
T72-xx	18.3	7.11	6.60	4.01	0.349	1.4	60	90	82	98.4	36
T80-xx	20.2	12.6	6.35	5.14	0.231	1.19	31	46	42	50.4	18
T80B-xx	20.2	12.6	9.53	5.14	0.347	1.78	46.5	71	63	75.6	29.5
T80D	20.2	12.6	12.7	5.14	0.453	2.33	61	92	83	99.6	39
T90-xx	22.9	14.0	9.53	5.78	0.395	2.28	47	20	64	76.8	30
T94-xx	23.9	14.2	7.92	5.97	0.362	2.16	42	60	57	68.4	25
T106-xx	26.9	14.5	11.1	6.49	0.659	4.28	70	93	95	114	45
T106A-xx	26.9	14.5	7.92	6.49	0.461	3.00	49	67	67	80.4	31.5
T106B-xx	26.9	14.5	14.6	6.49	0.858	5.57	91	124	124	148.8	58
T130-xx	33.0	19.8	11.1	8.28	0.698	5.78	58	81	79	94.8	35
T131-xx	33.0	16.3	11.1	7.72	0.885	6.84	29	116	108	129.6	52.5
T132-xx	33.0	17.8	11.1	7.96	0.805	6.41	70	103	95	114	44.5
T141-xx	35.9	22.4	10.5	9.14	0.674	6.16	51	75	69	82.8	32
T150-xx	38.4	21.5	11.1	9.38	0.887	8.31	65	96	89	106.8	41.5
T157-xx	39.9	24.1	14.5	10.1	1.06	10.7	73	100	99	118.8	42
T175-xx	44.5	37.2	16.5	11.5	1.34	15.0	82	105	105	126	49
T184-xx	46.7	24.1	18.0	11.2	1.88	21.0	46	169	159	190.8	72
T200-xx	50.8	31.8	14.0	13.0	1.27	16.4	67	92	92	110.4	42.5
T200B-xx	50.8	31.8	25.4	13.0	2.32	30.0	120	160	155	186	78.5
T201-xx	50.8	24.1	22.2	11.8	2.81	33.2	164	224	224	269.8	105
T224C-xx	27.2	31.8	19.1	14.0	2.31	32.2	114	155	155	186	72
T225-xx	57.2	35.7	14.0	14.6	1.42	20.7	67	98	92	110.4	42.5
T225B-xx	57.2	35.7	25.4	14.6	2.59	37.8	114	160	155	186	72
T250-xx	63.5	31.8	25.4	15	3.84	57.4	177	242	242	290.4	113

AL Unit = nH/T<sup>2</sup>

Tolerance on AL Value = TBA

Tolerance on Dimension = TBA

**Alliance Magnetics, LLC**

100 Executive Blvd. STE 202

Ossining, NY 10562

**Phone 914-944-1690**

Fax: 914-944-1691

email: [sales@allaincemagnetics.net](mailto:sales@allaincemagnetics.net)

Web Site: [www.allaincemagnetics.net](http://www.allaincemagnetics.net)